



# MOTOROLA

MODEL CHASSIS  
B3E HS-821  
B3W HS-821

(Continued on the next page, adjacent at right)

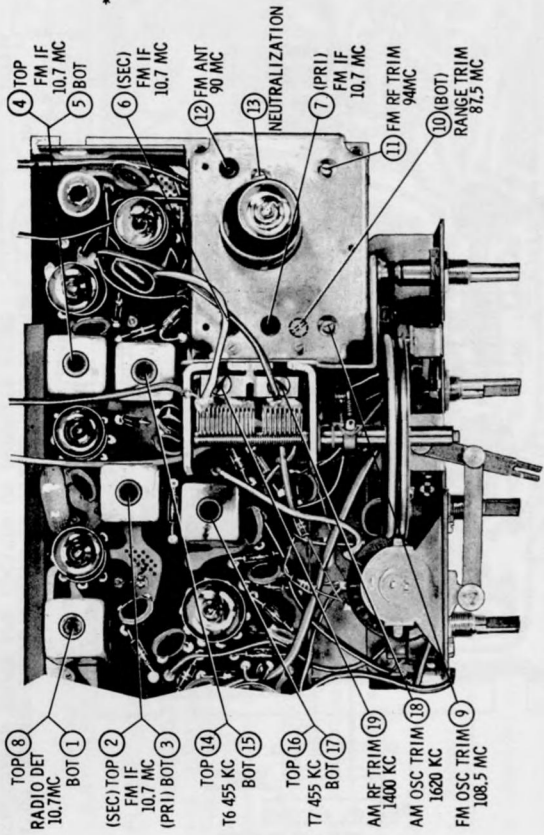

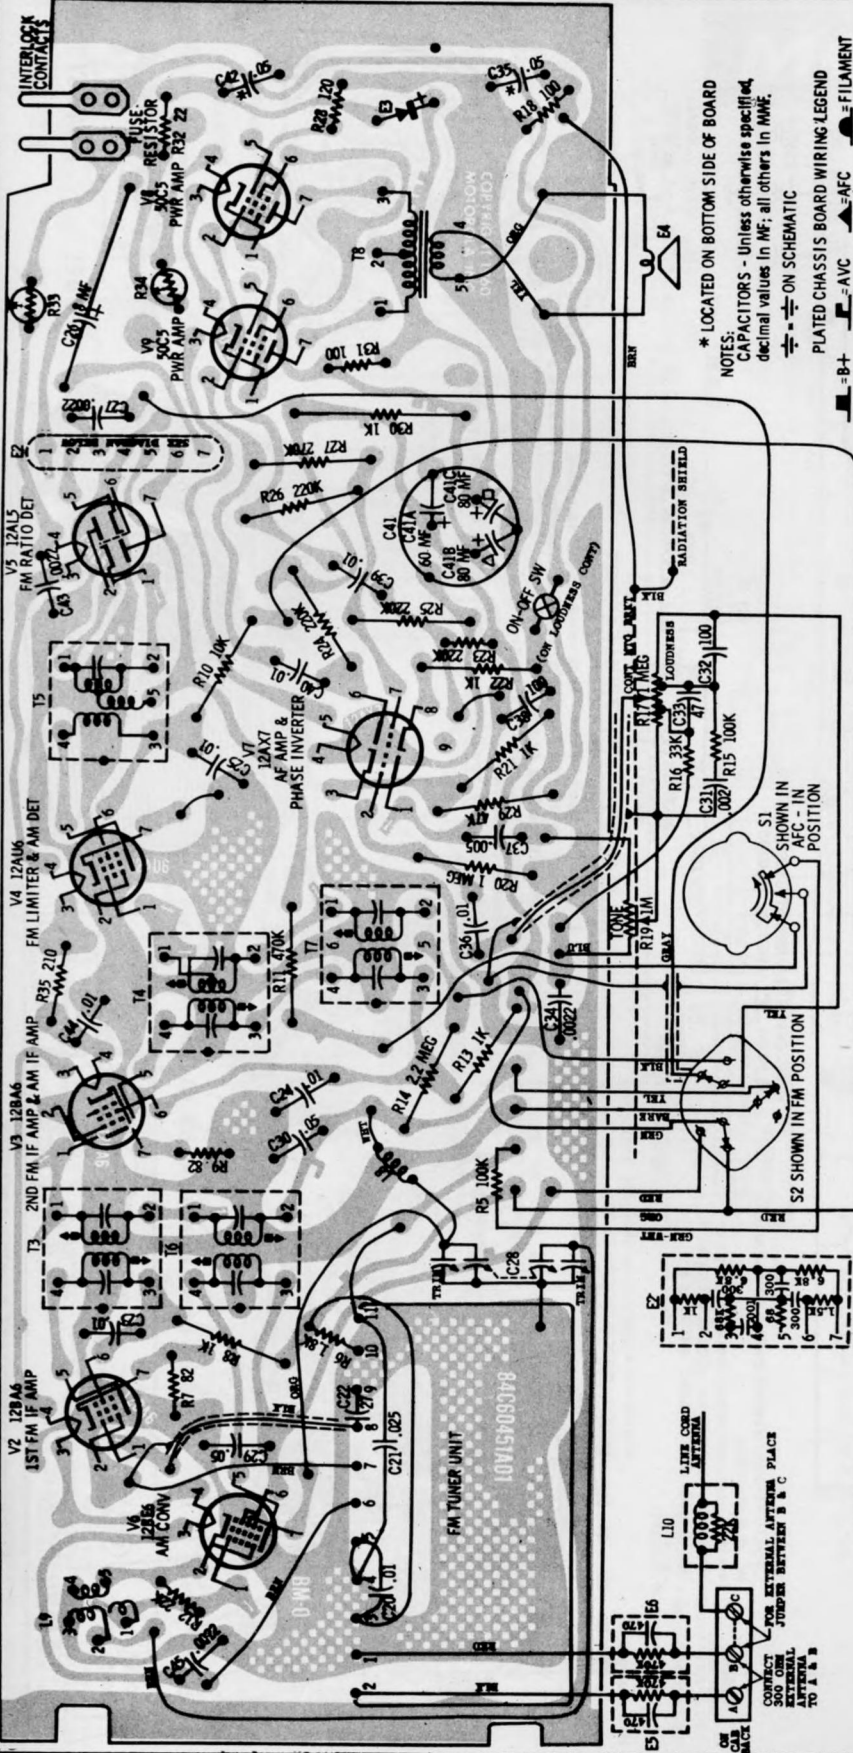

\* LOCATED ON BOTTOM SIDE OF BOARD  
 NOTES:  
 CAPACITORS - Unless otherwise specified, decimal values in MF; all others in MMF.  
 ON SCHEMATIC  
 PLATED CHASSIS BOARD WIRING LEGEND  
 = B+    = AVC    = FILAMENT

TO REMOVE CHASSIS FROM CABINET

1. Remove control knobs - pull straight off.
2. Remove 4 screws holding cabinet back to cabinet.
3. Remove 2 screws holding chassis support channel.
4. Remove 1 screw that mounts the AM gang mounting bracket to cabinet.
5. Remove dial crystal from cabinet - insert a screwdriver between the cabinet and top edge of the crystal to release catch, then pry out crystal.
6. Remove dial pointer - pull straight out.
7. Remove 2 chassis mounting palnuts from front of radio.
8. Unsolder speaker leads.
9. Unsolder lead of bottom shield.
10. Remove chassis from cabinet.

MOTOROLA Model B3E, W, Chassis HS-821  
 (Material continued from preceding page)

PLATED CHASSIS BOARD WIRING AS VIEWED FROM BOTTOM  
 (COMPONENTS SHOWN ARE LOCATED ON OPPOSITE SIDE)

